


ITEM	T1	T2
LED backlight	---	---
EL / without backlight	2.8	6.4

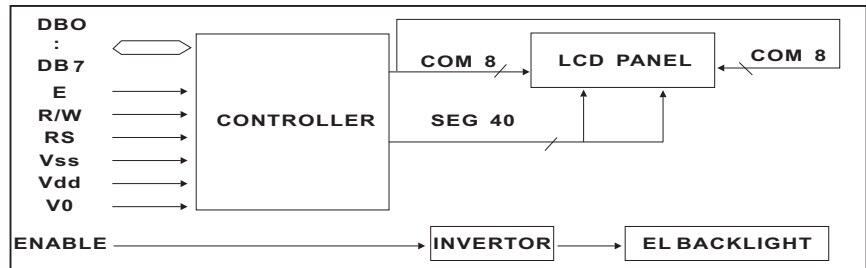

FEATURE

1. 5X8 dots with cursor
2. Built-in controller (SPLC780D or Equivalent)
3. +5V power supply (Also available for +3.0V)
4. 1/16 duty cycle
5. EL BKL, INVERTOR built-in

MECHANICAL SPECIFICATIONS

CHARACTER NUMBER	16W X 1H	—
OVERALL SIZE	73.00W X 24.00H	mm
VIEWING AREA	62.20W X 13.40H	mm
HOLE - HOLE	68.60/62.00W X 19.90H	mm
CHARACTER SIZE	3.07W X 6.56H	mm
CHARACTER PITCH	0.70W	mm
DOT SIZE	0.55W X 0.75H	mm
DOT PITCH	0.08W X 0.08H	mm

ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	MIN	MAX	UNIT
POWER SUPPLY (LOGIC)	Vdd	-0.3	7.0	V
POWER SUPPLY (LCD)	V0	Vdd-13.5	Vdd+0.3	V
INPUT VOLTAGE	Vin	-0.3	Vdd+0.3	V

ELECTRONICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	STANDARD			UNIT
			MIN	TYP	MAX	
Input voltage	Vdd	+5V	4.7	5.0	5.5	V
		+3.3V	2.7	3.0	3.3	V
Supply current	Idd	Vdd=5V	---	0.8	1.0	mA
Recommended LCD driving voltage for normal temp version module	Vdd-V0	0 °C	4.5	4.7	5.0	V
		25 °C	4.3	4.5	4.7	
		50 °C	4.1	4.3	4.5	
LED forward voltage	V _F	25 °C	---	---	---	V
LED forward current	I _F	25 °C	---	---	---	mA
EL power supply current	EL	AC 400Hz V _{EL} =110V	----	25	---	mA

PIN ASSIGNMENT

PIN	SYMBOL	FUNCTION
1	Vss	GND
2	Vdd	Power Supply
3	V0	Contrast Adjust
4	RS	Register Select Signal
5	R/W	Data Read/Write
6	E	Enable Signal
7-14	DB0-DB7	Data Bus Line
15	ENABLE	ENABLE SIGNAL
16	VSS	GND

DISPLAY CHARACTER ADDRESS CODE

Display position 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
 DDRAM address 00 01 02 -- -- -- 07 40 41 42 -- -- -- 47